

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US04/041396

International filing date: 09 December 2004 (09.12.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US
Number: 10/733,731
Filing date: 11 December 2003 (11.12.2003)

Date of receipt at the International Bureau: 10 January 2005 (10.01.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

January 05, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: *10/733,731*

FILING DATE: *December 11, 2003*

RELATED PCT APPLICATION NUMBER: *PCT/US04/41396*



Certified By

Jon W Dudas

Under Secretary
of Commerce for Intellectual Property
and Acting Director of the
United States Patent and Trademark Office

18379 U.S. PTO
121103

Dkt. 0239/69564

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

COMMISSIONER FOR PATENTS
P.O. Box 1450
Alexandria, VA 22313-1450
Mail Stop Patent Application

22264 U.S. PTO
10/733731
121103

S I R:

Transmitted herewith for filing are the specification and claims
of the patent application of:

Eric J. Argentar

Inventor(s)

CONTROL APPARATUS FOR USE WITH A COMPUTER OR VIDEO GAME SYSTEM

Title of Invention

Enclosed are:

- ☒ Specification, including 45 claims;
☒ 12 sheet(s) of informal ☒ formal drawings;
☒ Declaration and Power of Attorney of Applicant(s);
 An assignment of the invention to ;
 A Preliminary Amendment.
 A verified statement to establish small entity status under
37 C.F.R. §1.27 is also enclosed.
☒ Applicant is entitled to small entity status.

The filing fee is calculated as follows:

CLAIMS AS FILED, LESS ANY CLAIMS CANCELLED BY AMENDMENT

	NUMBER FILED	NUMBER EXTRA*		RATE		FEE	
				SMALL ENTITY	OTHER ENTITY	SMALL ENTITY	OTHER ENTITY
Total Claims	45-20	25	X	\$ 9	\$ 18	\$ 225	\$
Indep. Claims	3-3	0	X	\$ 43	\$ 86	\$ 0.00	\$
Multiple Dependent Claims Presented <u> </u> Yes <input checked="" type="checkbox"/> No				\$145	\$290	\$ 0.00	\$
*If the difference in Col. 1 is less than zero, enter "0" in Col. 2				BASIC FEE		\$ 385	\$ 770
				TOTAL FEE		\$ 610.00	

Patent Application Transmittal
Page 2

X A check in the amount of \$ 610.00 to cover the filing fee.

 Please charge Deposit Account No. 03-3125 in the amount of
\$.

X The Commissioner is hereby authorized to charge payment of
the following fees during the pendency of this application
or credit any overpayment to Deposit Account No. 03-3125.

X Any additional filing fees under 37 C.F.R. §1.16.

X Any patent application processing fees under 37 C.F.R.
§1.17.

 Applicant(s) hereby claim priority, under 35 U.S.C.
§119(a)-(d), of the following foreign application(s):

<u>Application No.</u>	<u>Country</u>	<u>Filing Date</u>	<u>Certified Copy Enclosed</u>
<u> </u>	<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>	<u> </u>

 Applicant(s) hereby claim priority, under 35 U.S.C.
§119(e), of the following United States provisional
application(s):

<u>Provisional Application No.</u>	<u>Filing Date</u>
<u> </u>	<u> </u>
<u> </u>	<u> </u>
<u> </u>	<u> </u>

 Applicant(s) hereby claim priority, under 35 U.S.C. §120,
of the following United States Application(s), or Section
365 of any PCT International Application(s) designating the
United States:

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>
<u> </u>	<u> </u>	<u> </u>

APPLICANT HEREBY REQUESTS THAT THE SUBJECT APPLICATION NOT
BE PUBLISHED UNDER U.S.C. 122(b), AND CERTIFIES THAT THE
INVENTION DISCLOSED IN THE APPLICATION HAS NOT BEEN AND
WILL NOT BE THE SUBJECT OF AN APPLICATION FILED IN ANOTHER
COUNTRY, OR UNDER A MULTILATERAL INTERNATIONAL AGREEMENT,
THAT REQUIRES PUBLICATION AT EIGHTEEN MONTHS AFTER FILING.

X Address all future correspondence to:


Norman H. Zivin
Cooper & Dunham LLP
1185 Avenue of the Americas
New York, New York 10036

X Three copies of this sheet are enclosed.

X Other (identify) Express Mail Certificate of Mailing
bearing Label No. EV325702572, dated
December 11, 2003 and one loose set of
drawings.

Dated: 12-11-03

Respectfully submitted,



Norman H. Zivin
Registration No. 25,385
Attorney for Applicant(s)
Cooper & Dunham LLP
1185 Avenue of the Americas
New York, New York 10036
(212) 278-0400

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE


Applicant : Eric. J. Argentar
Serial No. : Not Yet Known
Filed : Herewith
For : CONTROL APPARATUS FOR USE WITH A COMPUTER
OR VIDEO GAME SYSTEM

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450
Mail Stop Patent Application

EXPRESS MAIL CERTIFICATE OF MAILING
FOR ABOVE-IDENTIFIED NEW NON-PROVISIONAL APPLICATION

"Express Mail" mailing label number: EV325702572
Date of Deposit: December 11, 2003

I hereby certify that this new Non-Provisional Application of Eric J. Argentar, filed herewith, including Specification (30 pages), Claims 1-45 (13 pages), Abstract (1 page), cover page (1 page), formal drawings (12 Sheets), one extra set of drawings, Transmittal Letter in triplicate, a check in the amount of \$610.00, signed Declaration and Power of Attorney, and return postcard, is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on the date indicated above and is addressed to the Commissioner for Patents, Mail Stop Patent Application, P.O. Box 1450, Alexandria, VA 22313-1450.



Mail Room Employee
Depositing Express Mail Material

Attorney for Applicants:

Norman H. Zivin, Reg. No. 25,385
Cooper & Dunham LLP
1185 Avenue of the Americas
New York, New York 10036
Tel. (212) 278-0400

*Application
for
United States Letters Patent*

To all whom it may concern:

Be it known that, I, Eric J. Argentar,

have invented certain new and useful improvements in

CONTROL APPARATUS FOR USE WITH A COMPUTER OR VIDEO GAME SYSTEM

of which the following is a full, clear and exact description:

CONTROL APPARATUS FOR USE WITH A COMPUTER OR VIDEO GAME
SYSTEM

5

FIELD OF THE INVENTION

The present application is related to a control device for use with a computer system. More specifically, the invention relates to a control device for controlling a display of the computer system based on the horizontal and vertical tilt of the control device for use with a video game.

10

BACKGROUND OF THE INVENTION

As computers have become a part of every day life, video games playable on computers have similarly become a very popular means of entertainment. While software and computer graphics innovations have made video games very realistic, most video games rely on more contemporary input devices such as a keyboard, computer mouse or joystick to allow a player to interact with the video game. While these traditional input devices are familiar to most users and easy to operate, they tend to take away from the realism of the video game.

Furthermore, the improvements that have been made to video games have added many options and features that were simply not available previously. As a result, these traditional control devices lack the functionality to provide for the control of these additional functions and features. Users typically must use multiple control devices within the same game to allow for control of all features. For example, it is quite common for users to utilize a computer mouse along with extensive use of the keyboard to input commands and perform actions in the video

game because the computer mouse alone simply lacks sufficient functionality for today's video games. The use of multiple input devices complicates the playing of these video games to the point where the user must spend a significant amount of time simply familiarizing himself with the control devices prior to even attempting to proceed with playing the game. Naturally, this
5 robs the user of both a sense of reality while playing the game and takes away from the user's enjoyment.

The computer mouse allows a user to position a cursor on a display of a computer system by moving the mouse along a flat surface. A mouse ball in the base of the mouse rotates as the mouse is moved. The rotation of the mouse ball is correlated to movement of the cursor on the
10 screen. More recently, trackballs have been introduced to allow a user to position a cursor on the display of the computer system by manually rotating the track ball. The rotation of the track ball is similarly correlated to the positioning of the cursor on the display. However, the mouse requires a large, flat and substantially smooth two dimensional surface over which the mouse moves and thus, the user is somewhat restricted in where he or she can use the mouse while still
15 maintaining good control over positioning of the cursor. While trackballs eliminate the need for a large flat surface, they are typically mounted on the keyboard or some other computer system component, which tends to limit where the user can utilize the trackball as well. In addition, as noted above, both the computer mouse and trackball lack the functionality required to utilize the additional features and options available in advanced video games, thus necessitating the use of
20 additional control or input devices and complicating video game play.

Joysticks may provide a more realistic effect for certain video games. For example,

joysticks are similar in design to control sticks used in aircraft, and therefore, tend to add to the realism in a flight simulation video game. However, many do not add to realism in many other video games. While some joysticks may include additional control inputs, and thus, provide for increased functionality, even these joysticks do not provide sufficient functionality to satisfy the requirements of advanced video games and typically require the contemporaneous use of the keyboard.

Control devices that can be manipulated in free space to control a display of the computer system have been developed to free users from some of the restrictions of traditional control devices. Some control devices utilize sonic positioning. Typically, an ultrasonic transmitter in the device is monitored by an array of sensors. The position of the cursor on the screen is correlated to the position of the ultrasonic transmitter in the device relative to the array of sensors. Thus, these devices are limited in that they rely on an array of receivers and have range limits. In addition, they these control devices also lack functionality sufficient to play today's advanced video games.

More recently, gyroscopes have been incorporated into control devices in order to allow users to manipulate control devices in free space and position the cursor on the display by pointing the device at the desired position on the display (see, for example, U.S. Patent 5,825,350 to Case, Jr. et al.). Gyroscopes have long been used in aircraft to provide inertial space reference and to measure pitch and roll relative to the gravitational vector. In control devices utilizing gyroscopes, motion of the device in free space is typically translated into motion of the cursor on the display. More specifically, the vertical and horizontal tilt of the control device is translated

into the desired position of a cursor on the display of the computer system. These devices typically include a computer mouse function as well and may be connected to the computer system in a manner substantially similar to that of a conventional computer mouse. While these devices allow a user more freedom in using the device, these devices do not make a video game experience any more realistic, as they tend to be substantially similar in size and shape to the traditional computer mouse and thus offer little realism. Further, these devices function in a manner similar to the computer mouse and thus have similar limited functionality which means they are insufficient to control the additional options and features of today's advanced video games.

In addition, light guns have been developed for use with video games. These devices typically are shaped like a fire arm and project a beam of light. A screen placed over the display of the computer system senses this beam of light and is used to indicate a location on the display at which the user is aiming. These devices do provide some more realism, however, they are only useful for targeting in the video game. In addition, the user must point the light gun at the display in order to use it, which limits where the user can play the video game.

Accordingly, it is desirable to provide a control device for a computer system that is more realistic in shape and more intuitive in operation while also providing increased functionality for use with today's video games.

SUMMARY OF THE INVENTION

A control device for controlling a display of a computer system for use with a video game includes a coordinate control unit adapted to input information related to a vertical and a
5 horizontal tilt of the control device, a mouse control unit adapted to input computer mouse input information, a game play control unit adapted to input game play information and a controller adapted to process input information from the coordinate control unit, mouse control unit and game play control unit to provide game information to the computer system.

The control device may have a shape substantially similar to a firearm including a central
10 body, a handgrip extending downward from a rear section of the central body, a barrel extending longitudinally forward from the central body and a trigger extending downward from the central body in front of the handgrip.

The coordinate control unit may include a y-axis sensor adapted to input information regarding a tilt of the barrel of the control device in a vertical direction and an x-axis sensor
15 adapted to input information regarding a tilt of the barrel of the control device in a horizontal direction. The y-axis sensor may include a horizontal shaft attached to a side of the barrel that rotates as the barrel is tilted upward and downward, a first optical disk attached to the horizontal shaft such that the optical disk rotates with the horizontal shaft and at least one optical encoder adapted to correlate rotation of the optical disk to vertical tilt of the barrel to provide information
20 indicating a desired vertical point of view of a user in the video game or a desired vertical position of a cursor on the display. The x-axis sensor may include a vertical shaft connected to

the y-axis sensor such that the vertical shaft rotates as the barrel is tilted left and right, a second optical encoder disk attached to the vertical shaft such that the second optical disk rotates with the vertical shaft and at least one second optical encoder adapted to correlate the rotation of the second optical disk to a horizontal tilt of the barrel to provide information indicating a desired

5 horizontal point of view of a user in the video game.

The coordinate control unit may include at least one gyroscope adapted to provide information regarding the vertical and horizontal tilt of the control device in order to provide information regarding a desired vertical and horizontal point of view of the user in the video game or a desired vertical and horizontal position of the cursor on the display.

10 The mouse control unit may include a mouse wheel adapted to provide information to scroll up or down on the display, a left mouse button adapted to provide information regarding selections of a user and a right mouse button adapted to provide information regarding other selections of a user. The mouse wheel, the left mouse button and the right mouse button may be mounted on a side of the central body of the control device such that positioning a finger of a
15 user proximate to the trigger operates the mouse wheel, left mouse button and right mouse button.

The game play control unit may include a directional controller adapted to input information regarding longitudinal and lateral movement in space, a plurality of buttons adapted to provide information regarding a plurality of actions performed on the display, the plurality of
20 actions including running, crouching, jumping and selecting weapons and a coordinate activation button adapted to enable input of information from the coordinate control unit while depressed.

The plurality of controls may be positioned on the hand grip of the control device such that the game play controls are operable by a thumb of the user gripping the hand grip.

A fore grip may extend down from the barrel of the weapon and the directional controller may be positioned on the fore grip and operable by a thumb and fingers of a second hand of the user gripping the fore grip. The directional controller may be positioned on the barrel of the control device.

The game play control unit may include a shoot button mounted on the trigger of the control device.

The control device may also include a removable shoulder stock extending behind the central body of the control device and adapted to steady the control device against a shoulder of the user.

The control device may include a display unit mounted on the control device to provide additional image information to a user of the control device and may include a feedback unit adapted to provide tactile feedback to a user of the control device.

A method for positioning a cursor on a display of a computer system includes receiving information from a coordinate control unit related to a vertical and a horizontal tilt of a control device, receiving computer mouse input information from a mouse control unit, receiving information from a game play control unit and providing game information based on information received from the coordinate control unit, mouse control unit and game play control unit.

The control unit may have a shape substantially similar to a firearm including a central body, a handgrip extending downward from a rear section of the central body, a barrel extending

longitudinally forward from the central body and a trigger extending downward from the central body in front of the handgrip.

The step of receiving information related to the vertical and horizontal tilt of the control device may include receiving information regarding a tilt of the barrel relative to a centered vertical position of the control device from a y-axis sensor and receiving information regarding a tilt of the barrel relative to a centered horizontal position from an x-axis sensor. The step of receiving information from the y-axis sensor may include attaching a horizontal shaft to a side of the barrel that rotates as the barrel is tilted upward and downward, connecting a first optical disk attached to the horizontal shaft such that the optical disk rotates with the horizontal shaft and providing at least one optical encoder adapted to correlate rotation of the optical disk to vertical tilt of the barrel to provide information indicating a desired vertical point of view of a user in the video game.

The step of receiving information from the x-axis sensor may include connecting a vertical shaft to the y-axis sensor such that the vertical shaft rotates as the barrel is tilted left and right, connecting a second optical encoder disk attached to the vertical shaft such that the second optical disk rotates with the vertical shaft and providing at least one second optical encoder adapted to correlate the rotation of the second optical disk to a horizontal tilt of the barrel to provide information indicating a desired horizontal point of view of a user in the video game.

The step of receiving information from the coordinate control unit may include attaching at least one gyroscope to the control device and receiving information regarding the vertical and horizontal tilt of the control device from the gyroscope in order to provide information regarding

the desired vertical and horizontal point of view of a user in the video game.

The step of receiving mouse control information may include receiving information related to scrolling up and down on the display, receiving information regarding selections of a user from a left mouse button and receiving information regarding other selections of a user from
5 a right mouse button. The mouse wheel, the left mouse button and the right mouse button may be mounted on a side of the central body of the control device such that positioning a finger of a user proximate to the trigger operates the mouse wheel, left mouse button and right mouse button.

The step of receiving information from a game play control unit may include receiving
10 input information regarding longitudinal and lateral movement of a character on the display in space from a direction control unit, receiving information regarding a plurality of actions performed by the character on the display, from a plurality of controls and receiving activation information from a coordinate activation button to enable input of information from the coordinate control unit. The controls may be positioned on the hand grip of the control device
15 such that the controls are operable by a thumb of the user gripping the handgrip. The direction control unit may also be positioned on a fore grip, extending down from the barrel of the weapon and operable by a thumb and fingers of a second hand of the user gripping the fore grip. The plurality of controls may include a shoot button mounted on the trigger of the control device.

The control device further may include a removable shoulder stock extending behind the
20 central body of the control device and adapted to steady the control device against a shoulder of the user.

The method may include receiving additional image information to be displayed to a user via a display unit and/or receiving feedback information for providing tactile feedback to a user via a feedback unit.

A control device according to an embodiment of the present application for controlling a display of a computer system for use with a video game may include a coordinate control unit adapted to input information related to a vertical and a horizontal tilt of the control, a mouse control unit adapted to input computer mouse input information, a game play control unit adapted to input game play information and a controller adapted to process input information from the coordinate control unit, mouse control unit and game play control unit to provide game information to the computer system. The control device may be substantially u-shaped including a first open end, a second open end, and a connected end connecting the first open end and the second open end.

The coordinate control unit may include a y-axis sensor adapted to input information regarding a tilt of the control device in a vertical direction and an x-axis sensor adapted to input information regarding a tilt of the control device in a horizontal direction. The y-axis sensor may include a horizontal shaft attached to a side of the control device that rotates as the control device is tilted upward and downward, a first optical disk attached to the horizontal shaft such that the optical disk rotates with the horizontal shaft and at least one optical encoder adapted to correlate rotation of the optical disk to vertical tilt of the control device to provide information indicating a desired vertical point of view of a user in the video game. The x-axis sensor may include a vertical shaft connected to the y-axis sensor such that the vertical shaft rotates as the control

device is tilted left and right, a second optical encoder disk attached to the vertical shaft such that the second optical disk rotates with the vertical shaft and at least one second optical encoder adapted to correlate the rotation of the second optical disk to a horizontal tilt of the control device to provide information indicating a desired horizontal point of view of a user in the video game.

The y-axis sensor and the x-axis sensor may be positioned in a substantially u-shaped base such that the y-axis sensor detects rotation of a connecting member extending vertically from the base to the control device forward and backward to determine the vertical tilt of the control device and the x-axis sensor detects rotation of the connecting member left and right to determine the horizontal tilt of the control device.

The coordinate control unit may include at least one gyroscope adapted to provide information regarding the vertical and horizontal tilt of the control device in order to provide information regarding a desired vertical and horizontal point of view of a user in the video game.

The mouse control unit may include a mouse wheel adapted to provide information to scroll up or down on the display, a left mouse button adapted to provide information regarding selections of a user and a right mouse button adapted to provide information regarding other selections of a user. The mouse wheel, the left mouse button and the right mouse button may be mounted in a substantially centered position on a top surface of the connected end of the control device. The mouse wheel, the left mouse button and the right mouse button may be mounted in an off centered position on a top surface of the connected end of the control device.

The game play control unit may include a directional controller adapted to input

information regarding longitudinal and lateral movement in space positioned on the left side of the top surface of the connected end such that the directional controller is easily manipulated by the left thumb of the user, a plurality of buttons adapted to provide information regarding a plurality of actions performed on the display, the plurality of actions including running, crouching, jumping and special actions and positioned on the right side of the top surface of the control device such that the plurality of buttons are easily manipulated by the right thumb of the user and a coordinate activation button adapted to enable input of information from the coordinate control unit while depressed and positioned on a front surface of the connected end of the control device. Of course, the control unit may be constructed in a mirror format so that the right and left sides are reversed.

The control device may include a display unit mounted on the control device to provide additional image information to a user of the control device and/or a feedback unit adapted to provide tactile feedback to a user of the control device.

15

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a control device according to an embodiment of the present invention.

Figure 2 shows a particular form of the control device according to an embodiment of the present invention.

Figure 2A shows a particular form of the control device according to another embodiment

of the present invention.

Figure 3 illustrates a coordinate control unit of a control device according to an embodiment of the present application.

Figure 3A illustrates a coordinate control unit of a control device according to another embodiment of the present application.

Figure 4 illustrates a mouse control unit of a control device according to an embodiment of the present application.

Figure 5 illustrates a control device including a game play control unit according to an embodiment of the present application.

Figure 5A illustrates a control device including a game play control unit according to an embodiment of the present application.

Figure 6 is a flow chart illustrating a method of positioning a cursor on a display of a computer system according to an embodiment of the present application.

Figure 7 illustrates a control device including a game play control unit according to an embodiment of the present invention.

Figure 7A illustrates a control device including a game play control unit according to an embodiment of the present invention.

DETAILED DESCRIPTION

The control device **10** of the present application is particularly well suited for use by a player of a first person “shooter” type video game. In such video games, the player typically is presented with a first person view of an environment in the video game and is asked to aim at and shoot various targets. The user is commonly provided with a crosshair or other target designation, typically, in the center of the display. The point of view of the user in the game typically moves left, right, up, down, etc. based on the input from the computer mouse, keyboard, etc. to allow the user to aim at various targets in the video game. Targeting or aiming is typically accomplished by positioning the crosshair at the desired position, generally using the computer mouse or keyboard to change the point of view of the user in the video game or otherwise position the crosshair on the display in the video game. Shooting the target is typically accomplished by pressing a dedicated shoot button. The dedicated shoot button is typically one of the mouse buttons or a key on the keyboard. Similarly, joysticks may also be used to change the point of view of the user in the game and shooting is typically accomplished by pressing a shoot button, generally on the top of the joystick or on a base of the joystick. A control device that can quickly change the point of view of the user by simply moving the control device provides more intuitive and realistic interaction with the video game. While the control device **10** of the present disclosure is particularly well suited for use in such video games, the control device is preferably operable with any video game and may be used as a mouse in conventional computer applications as well. In addition, the control device of the present disclosure is

preferably compatible with video game systems such as the SONY PLAYSTATION 2 ®, a registered trademark of Sony Computer Entertainment, Inc. Similarly, the control device may be utilized with other computer simulations and virtual reality systems such as those commonly used by law enforcement and military agencies as training aids.

5 A control device **10** according to a first embodiment of the present invention is described with reference to Figure 1. A coordinate control unit **12** is used to input information regarding the desired horizontal and vertical point of view of the user in the video game. More specifically, the coordinate control unit **12** may be used to provide information related to pitch, the vertical tilt, and yaw, the horizontal tilt, of the control device **10** to indicate the desired horizontal and
10 vertical point of view of the display of the computer system. A mouse control unit **14** provides traditional computer mouse input information. A game play control unit **16** provides additional conventional game play input information. Controller **18** receives information from the coordinate control unit **12**, mouse control unit **14** and game play control unit **16** and provides game play information to the computer system. In this manner, the control device of the present
15 application includes substantially all of the functionality required to play today's advanced video games.

 A preferred shape of the control device is described further with reference to Figure 2. The control device **10** is preferably shaped as a firearm, that is, the control device **10** includes a hand grip **20** positioned below a rear section of a central body **22**. A trigger **24** extends down
20 from the central body **22** in front of the hand grip **20**. A barrel **26** extends forward from the central body **22**. An adjustable fore grip **28** may extend downward from the barrel **26** in front of

the trigger. For increased reality, the control device **10** may include a removable stock **29**, which can be used to steady the control device **10** against the user's shoulder. This will increase stability of the control device **10**. The control device **10** may also be configured as a pistol, another firearm, a pointer or the like. While a firearm is the desired shape of the control device, other shapes may be used, and the invention is not limited to that shape.

The control device **10** may be shaped as a game pad as illustrated in Figure 2A for example. Such game pads are typically substantially U-shaped. The user grasps the device by the free ends **200**, **200a** of the U-shape, typically grasping each end with a hand such that the user's finger curl around the free ends. The free ends **200**, **200a** may have a slight downward angle. The connected end **201** of the U-shape typically includes controls for point of view, longitudinal and lateral movement and various game play buttons.

In one embodiment, the coordinate control unit **12** is integrated with a bipod **25** or tripod (not shown) attached to the barrel **26** of the control device **10**. In an alternative embodiment, a gyroscope device **40** (see Figure 5) similar to that utilized in the gyroscopic control devices described above is mounted on the control device **10**. In either embodiment, the user is able to play the video game without the need to point the control device at the display and is not confined to the area of a mouse pad or sensor array during game play.

One embodiment of the coordinate control unit **12** is illustrated in further detail with reference to Figure 3. As noted above, the coordinate control unit **12** may be incorporated into a bipod **25** attached to the barrel **26** of the control device **10**. Utilizing this embodiment, the user will preferably mount the bipod **25** on a surface, such as a table, to stabilize the control device.

The coordinate control unit **12** may include a y-axis sensor **30** and an x-axis sensor **31** that detect movement of the barrel in the y-direction, pitch, and in the x-direction, yaw, respectively. More specifically, the y-axis sensor **30** and the x-axis sensor **31** determine the tilt of the barrel **26** in the y-direction and the x-direction, respectively. A first end of a horizontal shaft **32** may be attached to the barrel **26**. A second end of the horizontal shaft **32** may be connected to an optical encoding disk **33**. As the barrel **26** tilts up and down, the horizontal shaft **32** rotates and the optical encoding disk **33** rotates with the horizontal shaft **32**. Optical encoders **35** may be mounted on a printed circuit board in the main body of the y-axis sensor **30**. The optical encoders **35** determine the tilt of the barrel **26** in the y-direction, that is, up and down, on the rotation of the encoding wheel **33**. Based on the vertical tilt of the barrel **26**, the desired vertical point of view of the user in the video game is determined. Similarly, the desired vertical position of a cursor on the display may be determined based on the vertical tilt of the barrel **26**.

The y-axis sensor **30** is preferably mounted on a top end of a vertical strut **36**. The bottom of the vertical strut **36** may be connected to the x-axis sensor **31**. More specifically, the bottom end of the vertical strut **36** may be is connected to a vertical shaft **37**. The vertical shaft **37** may be connected to a second optical encoding disk **38**. As the barrel **26** moves or tilts horizontally, the vertical shaft **37** rotates, in turn, rotating the second optical encoding disk **38**. A second set of optical encoders **39** may be mounted on a printed circuit board of the main body of the x-axis sensor **31** to determine the desired horizontal point of view of the user in the video. The x-axis sensor may be used to determine the desired horizontal position of a cursor on the display of the computer system. In this manner, the coordinate control unit **12** provides

information regarding the pitch and yaw of the barrel which is then utilized to determine the desired point of view of the user on the display of the computer system.

Where the control unit is shaped like a game pad, it is unnecessary to implement the coordinate control unit as a bipod as described above. A simple stand that incorporates the x-axis sensor 31 and y-axis sensor 30 as described above provides a stable platform on which the
5 rest the control device 10 while at the same time acting as the coordinate control unit. In this embodiment, the horizontal shaft 32 is preferably connected to the control device 10 on a side surface or bottom surface of the connected end 201 or one of the free ends 200, 200A of the game pad. The stand may be similar in construction to that illustrated in Figure 3.

10 An alternative embodiment of the stand is described with reference to Figure 3A. A u-shape base 300 houses the y-axis sensor 30 and the x-axis sensor 31. A connecting strut 301 is connected at its bottom end to the base 300. The control device 10 is preferably detachably connected to the top end of the connecting strut 301. As the control device 10 tilts up or down, the connecting strut 301 rotates backward or forward. The y-axis sensor 30 determines the
15 vertical tilt of the control device based on this rotation in a manner similar to that described above. As the control device 10 rotates left and right, the x-axis sensor 31 determines the horizontal tilt of the control device in a manner similar to that described above. The base 300 may be fastened to a surface using a clip or clamp (not shown) to improve its stability if desired. While Figure 3 illustrates a stand used with the fire arm form of the control device 10 and Figure
20 3A illustrates a stand used with the game pad form of the control device, it is noted that both the fire arm form and the game pad form of the control device may be used with either of the stands

illustrated in Figure 3 and Figure 3A. Alternatively, the connecting strut 301 may extend out horizontally from the base 300.

Alternatively, the coordinate control unit 12 may be implemented using a gyroscope 40 (see Figure 5) similar to that proposed in the gyroscopic input devices discussed above.

5 Similarly, a gyroscope 210 may be incorporated into the control device 10 configured as a game pad as illustrated in Figure 2A for example. Where gyroscopes are used, the bipod 25 or stand is not necessary. In one embodiment, the gyroscope 40, 210 such as the solid state gyroscope mounted on a printed circuit board may be mounted on the control device. As noted previously, gyroscopes have been used for many years in the aviation industry to determine pitch and yaw of
10 aircraft. A solid state gyroscope such as that mentioned above may be utilized to determine the pitch and yaw of the control device 10 in the present application. The operation of gyroscopes is well known in the art and thus will not be discussed in detail herein. However, a brief discussion of the operation of gyroscopes may be useful in understanding the present invention.

Typically, a gyroscope includes a rotating disk, rotating about an axis of rotation and
15 mounted on a frame rotatable on one or two axes perpendicular to the axis of rotation of the disk. The spinning disk may be a rotating electric motor. The axis of rotation of the motor is typically aligned with the gravity vector. If a force is applied along the axis of rotation of the motor, the force is resisted due to the constant angular momentum of the spinning disk. As a result, the frame will rotate along an axis perpendicular to the axis of rotation of the motor. The rotation of
20 the frame can be monitored. Thus, for example, where a forward tilting force is applied to the gyroscope, a forward force is applied to the top of the axis of rotation of the motor, and a

rearward force is applied to the bottom of the axis of rotation of the motor. The constant angular momentum of the spinning motor opposes these forces and the shaft of the motor will rotate in a direction perpendicular to the applied force. Since the frame is free to rotate along the axis perpendicular to the axis of rotation of the motor, the frame rotates. The direction of this rotation depends on the direction of rotation of the spinning motor. The rotation of the frame is proportional to the tilt of the frame forward. Thus, based on the rotation of the frame, it is possible to determine the tilt of the gyroscope. Where the frame is free to rotate about two axes perpendicular to the axis of rotation of the motor, tilting up and down and left and right can be correlated to the rotation of the frame about either axis. Alternatively, a second gyroscope that is mounted on a frame free to rotate in another direction perpendicular to the axis of rotation of the motor may be incorporated to determine tilt in the horizontal direction. In the present application, solid state gyroscopes are preferably used, which do not typically utilized motors as described above, but works on the same principle to provide pitch and/or yaw information.

Utilizing the solid state gyroscope, for example, mounted on the control device 10, the vertical and horizontal tilt of the control device can be determined. In this manner, the desired point of view of the user in the video game or the desired position of a cursor on the display of the computer system can be determined. As noted above, there are presently available control devices that utilize gyroscopes to determine the pitch and yaw of the device. The gyroscope used in such a device may be used as the gyroscope of the present invention. The gyroscope 210 can similarly be mounted on the control device 10 where the control device is a game pad as noted above. In this case, the gyroscope is preferably mounted in or on the connected end 201

The inclusion of the gyroscope **210** eliminates the need for a bipod or stand as described above. However, it may be preferable to use the stand in order to aid stability for the user. In addition, use of the stand allows the user to release the control device **10** without altering the point of view of the user in the video game. Thus, the user is able to take a break from game play
5 without altering his or her view in the game.

The mouse control unit **12** preferably provides for functions commonly provided by conventional computer mouse and is described with reference to Figure 4. In a preferred embodiment, a mouse wheel **41** is mounted on the central body **22** of the control device **10**, preferably on a side of the central body above the trigger **24**. A mouse wheel is commonly
10 incorporated into a conventional computer mouse to allow a user to easily scroll up or down on the display or through a menu illustrated on the display. Similarly, the mouse wheel **41** of the present disclosure may be utilized to allow the user to scroll through a menu in the video game or any other computer application. Two buttons **42, 43** may be mounted under the mouse wheel **41**.

These buttons may function as the left mouse button **42** and right mouse button **43**, commonly.

15 incorporated in a computer mouse for making selections on menus, selecting text, calling up menus or the like. In a preferred embodiment, the mouse wheel **41**, the left mouse button **42** and right mouse button **43** are positioned above the trigger **24** such that they can be easily reached and manipulated by a finger of the user that may also be used to pull the trigger or triggers **24** of the control device **10**. The information related to the vertical and horizontal tilt of the control
20 device **10** may be utilized to provide information regarding the vertical and horizontal position of a cursor on the display such that the control device is capable of performing all the same

functions of a computer mouse.

The mouse control unit **14** may similarly be incorporated into the game pad embodiment if desired. Preferably, the mouse control unit **14** is mounted on the connected end **201** of the control pad, on the top surface and substantially centered. In this embodiment, the left mouse button **42** and right mouse button **43** are preferably positioned slightly forward of the mouse wheel **40** as seen in Figure 2A. Alternatively, the mouse control unit **14** may be positioned on the top surface of the connected end **201** of the control pad slightly off center such that the mouse control unit **14** is easily operated by a thumb of the user. That is the left mouse button **42**, right mouse button **43** and mouse wheel **41** may be positioned above the game play controls **52, 53, 54, 55** (discussed below) for example and may be easily activated using the same thumb used by the user to activate the game play controls.

The game play control unit **16** preferably includes game play controls and is illustrated in Figure 5. Game play controls include controls for inputting information related to other aspects of the video game, for example, character movement in space in the video game, also referred to as longitudinal and lateral movement. A hat switch **50** and/or a directional switch **51** are preferably used to control the lateral and longitudinal movement of a character in the game. While the hat switch **50** and the directional switch **51** may both be used to control lateral movement, they function in a slightly different manner. The hat switch **50** typically includes four momentary contact switches with a pad mounted over them. Each momentary contact switch is activated when the user presses down on the section of the pad that is over the respective momentary contact switch. Typically, only one momentary contact switch may be activated at a

time, that is, input from more than one momentary contact switch is generally ignored. The directional switch **51**, however, typically allows input regarding motion in two directions at the same time. The direction switch **51** preferably includes four independent contact switches **51a**, **51b**, **51c**, **51d**, generally in a diamond shaped configuration. Each of the independent contact switches **51a**, **51b**, **51c**, **51d** typically is used to provide for movement in a particular direction in the video game. Unlike the hat switch **50**, users are generally able to activate more than one of the contact switches at the same time. More specifically, most video games will allow for movement in the right and forward direction at the same time, for example. The result is diagonal movement in the video game. For example, conventional video games will allow such movement when the keyboard is used as the control device. The independent contact switches **51a**, **51b**, **51c**, **51d** of the directional switch **51** may mimic such control from the keyboard. This allows a user of the video game to move the character forward, backward, left, right and diagonally in space in the video game environment. In addition, where the user uses the hat switch **50** for longitudinal and lateral movement in the video game, for example, the direction switch **51** may be used for other functions which increases the flexibility of the control device **10**. Alternatively, where the direction switch **51** is used longitudinal and lateral movement in the video game, for example, the hat switch **50** may be used for other functions.

In addition, game play controls may include a jump button **52**, a run button **53**, a crouch button **54** and a special action button **55**. These game play controls may be positioned on a side surface of the hand grip **20** of the control device **10** such that they are easily operated by the thumb of the user as it wraps around the hand grip (See Figure 5A). A shoot button **56** may also

be considered a game play control, and will be explained in further detail below. Naturally, different games may have different game play options, and thus, it is impossible to list all possible game play controls, however, the control device of the present application is intended to be compatible with most every video game.

5 A coordinate activation button **57** is preferably included in the game play control unit **16**.
The activation button **57** activates the input of information from the coordinate control unit **12** while depressed. That is, ordinarily the information from the coordinate control unit is not used to control the display of the computer system. In this manner, inadvertent jostling or movement of the control device **10** by the user is not used to alter the point of view of the user in the video
10 game or the position of the cursor on the display. The user depresses the activation button **57** when they wish to change the point of view or position of the cursor. Generally, this operation is intuitive to the user in that the user depresses a button when he or she desires to change the display of the computer system and otherwise inadvertent movements do not affect the display of the computer screen. In this manner, a user can reposition the control device for comfort without
15 changing the point of view of the user in the computer game or the position of the cursor on the display. Alternatively, the activation button **57** may be used as a kill button, that is, the information from the coordinate control unit **12** is utilized to control the display normally, unless the kill button is depressed. This is slightly less intuitive for a user, however, it still provides a way for the user to adjust his or her position or grip without affecting the display of the computer
20 system when necessary. In addition, the activation button **57** may be a lever type switch positioned on the rear or front of the hand grip **20**.

The game play control unit **16** may be mounted on the optional fore grip **28** of the control device **10** which can be grasped by the user. These controls are preferably positioned on the fore grip **28** such that they are under the fingers of a user gripping the fore grip. More specifically, the hat switch **50** or directional switch **51** may be positioned under or adjacent to the thumb of the user, while the other of the directional or hat switches may be positioned under or adjacent to the fingertips of the user on the hand grip **20**. The fore grip **28** is preferably adjustably attachable to the barrel **26** of the control device **10** such that it can be moved forward or backward on the barrel in accordance with the preference of the user. The activation button **57** may be positioned on the fore grip as well (See Figure 5).

Alternatively, the game play control unit **16** may be positioned on the barrel **26** of the control device. Preferably, the direction switch **51** is positioned on one face of the barrel such that the contact switches **51a, 51b, 51c, 51d** are easily activate by the fingers on the user cradling the barrel (See Figure 7). The hat switch **50** may be positioned on the opposite face such that it is easily activated by the thumb of the user (See Figure 7A).

As noted above the shoot button **56** may generally be considered a game play control, however, in a preferred embodiment of the present application, the shoot button is positioned in the trigger **24** of the control device **10**. In order to increase the realism of the control device **10**, it is preferable to mount the shoot button **56** in the trigger **24**. A second shoot button **56a** may also be positioned in the trigger **24**. Such a second button may be useful where a video game provides a user with two weapons, for example. Alternatively, the trigger **24** itself may be used as the shoot button **56** or buttons such that pulling back either trigger corresponds to firing a primary

and/or secondary weapon in the video game. In addition, as noted above, a second independent trigger may be included and used as the second shoot button **56a**.

The game play control unit **16** may be positioned on the hand grip **20** of the control device **10** such that the controls are easily manipulated by the user gripping the hand grip (See Figure 5A). The controls are preferably positioned on the hand grip **20** such that the buttons **52**, **53**, **54** and **55** are easily manipulated by a thumb of the user. An embodiment such as this may be particularly useful where the shape of the control device **10** is a pistol and it would be inconvenient to utilize a fore grip.

As noted above, where the control device **10** is shaped like a game pad, the game play control unit **16**, is preferably mounted on the top surface of the connected end **201** of the game pad and additional game play controls may be mounted on the front surface of the connected end, generally called “shoulder” buttons. In a preferred embodiment, a hat switch **50** or direction switch **51** may be positioned on the left side of the connected end **201** within easy reach of a left thumb of the user. The other game controls, **52**, **53**, **54** and **55** are preferably positioned on the right side of the connected end **201** within easy reach of a right thumb of the user. Additional game control may be positioned on the front surface of the connected end **201** of the game pad. In a preferred embodiment, these game controls include various activity buttons including the shoot button **56** and the coordinate activation button **57**, which may be positioned on the right front surface of the connected end such that they can be depressed by the right index finger of the user. Similarly additional game controls **202**, **203** may be positioned on the front left surface of the connected end. Further, it is common for game pads to include two small analog or digital

joysticks, **204, 205** positioned for easy manipulation by the left and right thumb of the user, respectively. Typically, either of these joysticks **204, 205** or the hat switch or directional button **50, 51** are utilized to change the point of view in the video game, however, since that function is performed based on pitch and yaw information provided by the coordinate control unit **12**, a
5 different function can be assigned to the control traditional used. Alternatively, one of these controls can be eliminated, although it is advantageous to provide many game controls in order to control modern video games.

In either the firearm embodiment or the control pad embodiment a lever type button **58** may be included to provide input when pressure is applied. In the firearm embodiment, the lever
10 type button **58** may be positioned on the rear of the hand grip **20** such that it can be easily activated by the hand of the user gripping the hand grip. The lever type button may also be positioned on a front side of the hand grip **20** on the lower portion below the trigger **24**. In the game pad embodiment, the lever type button is preferably positioned on one of the free ends **201, 201a** of the game pad on either the top or bottom surface thereof. The lever type button **58** is
15 preferably utilized as the coordinate activation button **57**. In this case the button **57** described above may be used to control another function.

The controller **18** processes information provided by the coordinate control unit **12**, the mouse control unit **14**, and the game play control unit **16** to provide information to the computer system. In a preferred embodiment, the controller **18** is a microprocessor or microchip. The
20 controller **18** may be a microchip similar to that utilized in conventional joysticks. Data provided by the coordinate control unit **12** is utilized to provide information to the computer system related

to the desired point of view of the user or desired vertical and horizontal position of the cursor on the display. Information provided by the mouse control unit **14** is utilized to provide information related to conventional mouse functions such as scrolling through and selecting information displayed on the display. Information provided by the game play control unit **16** is utilized to
5 provide information related to additional game play options or actions. Using such a controller **18**, the control device **10** can be connected to the computer system via a USB port, as is common for conventional joysticks. The control unit **10** of the present application is compatible with most commercially available joystick microchips. Alternatively, a custom designed microchip may be utilized as the controller **18**.

10 The control device **10** of the present application may be compatible with conventional joystick or game pad microchips and thus may not require any special software for operation with the computer system. That is, no special drivers may be necessary to integrate the control device with the computer system. Similarly, the control device of the present disclosure is preferably compatible with default software commonly provided with conventional computer systems. Of
15 course, software could be written specifically for the control device **10** of the present disclosure to enable all buttons, meaning that the user may select what function each of the game play controls of the device controls. This software preferably includes driver software to allow for detection of the device by the operating system of the computer system, for example for detection by Windows®, a registered trademark of Microsoft Corporation. In addition, the software
20 preferably includes programming software to allow the user to program individual controls and to create custom files for individual games, for example.

While the present disclosure discloses specific locations for the various game play controls, it is noted that the game play controls can be configured in most any way, depending on the desire of the user.

The control device **10** may be connected via a USB cable to a USB port of the computer system as mentioned above, or may be connected via a wireless or optical link. Both wireless and optical links for computer systems are presently available. In this embodiment, a battery may be provided to power the control unit **10**, such that the control unit can be completely wireless.

The control device may also include a feedback unit **19** (see Figure 1A). The feedback unit provides added elements of reality, by providing tactile feedback to the user. For example, the feedback unit may be utilized to cause a vibration in the control device **10** when the fire button **56** is depressed to simulate the recoil of a firearm. Similarly, the control device may be vibrated to simulate an injury to the character in the video game. Such feedback is commonly available in conventional control devices.

The control device **10** may also include a small display unit **27** (see Figure 2) that replicates or adds to the information provided on the display of the computer system. For example, the display unit may act as a heads up display or HUD to provide certain information to the user that is more easily visible on the display unit than on the display of the computer system.

The display unit may also be utilized to recreate the image on the display of the computer screen, such that the user need not necessarily sit in front of the display of the computer screen to play the game.

A method for controlling a display of a computer system for use with a video game

according to an embodiment of the present disclosure is described with reference to Figure 6. At step S60 information related to the vertical and horizontal tilt of the control device is received.

Mouse input information is received at step S62. Game play information is received at step S64.

At step S66, the input information related to vertical and horizontal tilt of the control device, the

5 mouse input information and the game play information are processed and game information is provided to the computer system. The coordinate information may be utilized to provide information related to a desired vertical and horizontal point of view of the user in the video game or to indicate a desired vertical and horizontal position of a cursor on a display of the computer system.

10 The method of Figure 6 is substantially implemented by the control device 10 described above and is not discussed in further detail herein.

While the present application discloses specific embodiments of a method and control device for controlling display of a computer system, it should be understood that many variations are possible. The present application is intended to extend to all such variations permissible under the
15 claims appended hereto.

CLAIMS

What is claimed is:

1. A control device for controlling a display of a computer system for use with a video
5 game comprising:
 - a coordinate control unit adapted to input information related to a vertical and a
horizontal tilt of the control device;
 - a mouse control unit adapted to input computer mouse input information;
 - a game play control unit adapted to input game play information; and
 - 10 a controller adapted to process input information from the coordinate control unit, mouse
control unit and game play control unit to provide game information to the computer system.
2. The control device of claim 1, wherein the control device has a shape substantially
similar to a firearm comprising:
 - 15 a central body;
 - a handgrip extending downward from a rear section of the central body;
 - a barrel extending longitudinally forward from the central body; and
 - a trigger extending downward from the central body in front of the handgrip.
- 20 3. The control device of claim 2, wherein the coordinate control unit further comprises:
 - a y-axis sensor adapted to input information regarding a tilt of the barrel of the control

device in a vertical direction; and

an x-axis sensor adapted to input information regarding a tilt of the barrel of the control device in a horizontal direction.

5 4. The control device of claim 3, wherein the y-axis sensor further comprises:

a horizontal shaft attached to a side of the barrel that rotates as the barrel is tilted upward and downward;

a first optical disk attached to the horizontal shaft such that the optical disk rotates with the horizontal shaft; and

10 at least one optical encoder adapted to correlate rotation of the optical disk to vertical tilt of the barrel to provide information indicating a desired vertical point of view of a user in the video game.

5. The control device of claim 3, wherein the x-axis sensor further comprises:

15 a vertical shaft connected to the y-axis sensor such that the vertical shaft rotates as the barrel is tilted left and right;

a second optical encoder disk attached to the vertical shaft such that the second optical disk rotates with the vertical shaft; and

20 at least one second optical encoder adapted to correlate the rotation of the second optical disk to a horizontal tilt of the barrel to provide information indicating a desired horizontal point of view of a user in the video game.

6. The control device of claim 1, wherein the coordinate control unit further comprises:
at least one gyroscope adapted to provide information regarding the vertical and
horizontal tilt of the control device in order to provide information regarding a desired vertical
5 and horizontal point of view of the user in the video game.

7. The control device of claim 1, wherein the coordinate control unit further comprises:
at least one gyroscope adapted to provide information regarding the vertical and
horizontal tilt of the control device in order to provide information regarding a desired vertical
10 and horizontal position of a cursor on the display of the computer system.

8. The control device of claim 2, wherein the mouse control unit comprises:
a mouse wheel adapted to provide information to scroll up or down on the display;
a left mouse button adapted to provide information regarding selections of a user; and
15 a right mouse button adapted to provide information regarding other selections of a user.

9. The control device of claim 8, wherein the mouse wheel, the left mouse button and the
right mouse button are mounted on a side of the central body of the control device such that
positioning a finger of a user proximate to the trigger operates the mouse wheel, left mouse
20 button and right mouse button.

10. The control device of claim 2, wherein the game play control unit comprises:
a directional controller adapted to input information regarding longitudinal and lateral movement in space;
a plurality of buttons adapted to provide information regarding a plurality of actions
5 performed on the display, the plurality of actions including running, crouching, jumping and special actions; and
a coordinate activation button adapted to enable input of information from the coordinate control unit while depressed.

10 11. The control device of claim 10, wherein the plurality of buttons are positioned on the hand grip of the control device such that the plurality of buttons are operable by fingers of the user gripping the hand grip.

12. The control device of claim 11, further comprising:
15 a fore grip, extending down from the barrel of the weapon, wherein the directional controller is positioned on the fore grip and is operable by a thumb and fingers of a second hand of the user gripping the fore grip

13. The control device of claim 11, wherein the directional controller is positioned on the
20 barrel of the control device.

14. The control device of claim 12, wherein the game play control unit further comprises
a shoot button mounted on the trigger of the control device.

15. The control device of claim 2, further comprising a removable shoulder stock
5 extending behind the central body of the control device and adapted to steady the control device
against a shoulder of the user.

16. The control device of claim 1, further comprising a display unit mounted on the
control device to provide additional image information to a user of the control device.

10 17. The control device of claim 1, further comprising a feedback unit adapted to provide
tactile feedback to a user of the control device.

18. A method for controlling a display of a computer system comprising:
15 receiving information from a coordinate control unit related to a vertical and a horizontal
tilt of a control device;
receiving computer mouse input information from a mouse control unit;
receiving information from a game play control unit; and
providing game information based on information received from the coordinate control
20 unit, mouse control unit and game play control unit.

19. The method of claim 18, wherein the control unit has a shape substantially similar to a firearm comprising:

a central body;

a handgrip extending downward from a rear section of the central body;

5 a barrel extending longitudinally forward from the central body; and

a trigger extending downward from the central body in front of the handgrip.

20. The method of claim 19, wherein the step of receiving information related to the vertical and horizontal tilt of the control device comprises:

10 receiving information regarding a tilt of the barrel relative to a centered vertical position of the control device from a y-axis sensor; and

receiving information regarding a tilt of the barrel relative to a centered horizontal position from an x-axis sensor.

15 21. The method of claim 20, wherein the step of receiving information from the y-axis sensor further comprises:

attaching a horizontal shaft to a side of the barrel that rotates as the barrel is tilted upward and downward;

connecting a first optical disk attached to the horizontal shaft such that the optical disk
20 rotates with the horizontal shaft; and

providing at least one optical encoder adapted to correlate rotation of the optical disk to

vertical tilt of the barrel to provide information indicating a desired vertical point of view of a user in the video game.

22. The method of claim 21, wherein the step of receiving information from the x-axis sensor further comprises:

connecting a vertical shaft to the y-axis sensor such that the vertical shaft rotates as the barrel is tilted left and right;

connecting a second optical encoder disk attached to the vertical shaft such that the second optical disk rotates with the vertical shaft; and

providing at least one second optical encoder adapted to correlate the rotation of the second optical disk to a horizontal tilt of the barrel to provide information indicating a desired horizontal point of view of a user in the video game.

23. The method of claim 18, wherein the step receiving information from the coordinate control unit further comprises:

attaching at least one gyroscope to the control device; and

receiving information regarding the vertical and horizontal tilt of the control device from the gyroscope in order to provide information regarding the desired vertical and horizontal point of view of a user in the video game.

24. The method of claim 19, wherein the step of receiving mouse control information

comprises:

receiving information related to scrolling up and down on the display;
receiving information regarding selections of a user from a left mouse button; and
receiving information regarding other selections of a user from a right mouse button.

5

25. The method of claim 24, wherein the mouse wheel, the left mouse button and the right mouse button are mounted on a side of the central body of the control device such that positioning a finger of a user proximate to the trigger operates the mouse wheel, left mouse button and right mouse button.

10

26. The method of claim 18, wherein the step of receiving information from a game play control unit comprises:

receiving input information regarding longitudinal and lateral movement of a character on the display in space from a direction control unit;

15 receiving information regarding a plurality of actions performed by the character on the display, from a plurality of controls; and

receiving activation information from a coordinate activation button to enable input of information from the coordinate control unit.

20

27. The method of claim 26, wherein the controls are positioned on the hand grip of the control device such that the controls are operable by a thumb of the user gripping the handgrip.

28. The method of claim 27, wherein the direction control unit is positioned on a fore grip, extending down from the barrel of the weapon and is operable by a thumb and fingers of a second hand of the user gripping the fore grip.

5

29. The method of claim 28, wherein the plurality of controls includes a shoot button mounted on the trigger of the control device.

30. The method of claim 19, wherein the control device further comprises a removable
10 shoulder stock extending behind the central body of the control device and adapted to steady the control device against a shoulder of the user.

31. The method of claim 18, further comprising receiving additional image information to be displayed to a user via a display unit.

15

32. The method of claim 18, further comprising receiving feedback information for providing tactile feedback to a user via a feedback unit.

33. A control device for controlling a display of a computer system for use with a video
20 game comprising:

a coordinate control unit adapted to input information related to a vertical and a

horizontal tilt of the control;

a mouse control unit adapted to input computer mouse input information;

a game play control unit adapted to input game play information; and

a controller adapted to process input information from the coordinate control unit, mouse

5 control unit and game play control unit to provide game information to the computer system.

34. The control device of claim 33, wherein the control device is substantially u-shaped comprising:

a first open end;

10 a second open end; and

a connected end connecting the first open end and the second open end.

35. The control device of claim 34, wherein the coordinate control unit further comprises:

15 a y-axis sensor adapted to input information regarding a tilt of the control device in a vertical direction; and

an x-axis sensor adapted to input information regarding a tilt of the control device in a horizontal direction.

20 36. The control device of claim 35, wherein the y-axis sensor further comprises:

a horizontal shaft attached to a side of the control device that rotates as the control device

is tilted upward and downward;

a first optical disk attached to the horizontal shaft such that the optical disk rotates with the horizontal shaft; and

at least one optical encoder adapted to correlate rotation of the optical disk to vertical tilt
5 of the control device to provide information indicating a desired vertical point of view of a user in the video game.

37. The control device of claim 36, wherein the x-axis sensor further comprises:

a vertical shaft connected to the y-axis sensor such that the vertical shaft rotates as the
10 control device is tilted left and right;

a second optical encoder disk attached to the vertical shaft such that the second optical disk rotates with the vertical shaft; and

at least one second optical encoder adapted to correlate the rotation of the second optical disk to a horizontal tilt of the control device to provide information indicating a desired
15 horizontal point of view of a user in the video game.

38. The control device of claim 35, wherein the y-axis sensor and the x-axis sensor are positioned in a substantially u-shaped base such that the y-axis sensor detects rotation of a connecting member extending vertically from the base to the control device forward and
20 backward to determine the vertical tilt of the control device and the x-axis sensor detects rotation of the connecting member left and right to determine the horizontal tilt of the control device.

39. The control device of claim 33, wherein the coordinate control unit further comprises:

at least one gyroscope adapted to provide information regarding the vertical and
5 horizontal tilt of the control device in order to provide information regarding a desired vertical
and horizontal point of view of a user in the video game.

40. The control device of claim 34, wherein the mouse control unit comprises:
a mouse wheel adapted to provide information to scroll up or down on the display;
10 a left mouse button adapted to provide information regarding selections of a user; and
a right mouse button adapted to provide information regarding other selections of a user.

41. The control device of claim 40, wherein the mouse wheel, the left mouse button and
the right mouse button are mounted in a substantially centered position on a top surface of the
15 connected end of the control device.

42. The control device of claim 40, wherein the mouse wheel, the left mouse button and
the right mouse button are mounted in an off centered position on a top center of the connected
end of the control device.

20

43. The control device of claim 34, wherein the game play control unit comprises:

a directional controller adapted to input information regarding longitudinal and lateral movement in space positioned on the left side of the top surface of the connected end such that the directional controller is easily manipulated by the left thumb of the user.

5 a plurality of buttons adapted to provide information regarding a plurality of actions performed on the display, the plurality of actions including running, crouching, jumping and selecting weapons and positioned on the right side of the top surface of the control device such that the plurality of buttons are easily manipulated by the right thumb of the user; and

10 a coordinate activation button adapted to enable input of information from the coordinate control unit while depressed and positioned on a front surface of the connected end of the control device.

44. The control device of claim 33, further comprising a display unit mounted on the control device to provide additional image information to a user of the control device.

15 45. The control device of claim 33, further comprising a feedback unit adapted to provide tactile feedback to a user of the control device.

ABSTRACT

A control device for controlling a display of a computer system for use with a video game
5 includes a coordinate control unit for providing information related to a vertical and horizontal
tilt of the control device, a mouse control unit for inputting conventional mouse input
information, a game control unit for inputting game control information and a controller for
processing the information provided by the coordinate control unit, mouse control unit and game
control unit. The vertical and horizontal point of view of the user in the video game and/or the
10 vertical and horizontal position of a cursor on the display is determined based on the information
related to the vertical and horizontal tilt of the control device. The control device is preferably
shaped like a firearm to enhance the realism of the video game, but may be shaped like a
conventional game pad.

15

20

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

FIGURE 1

10

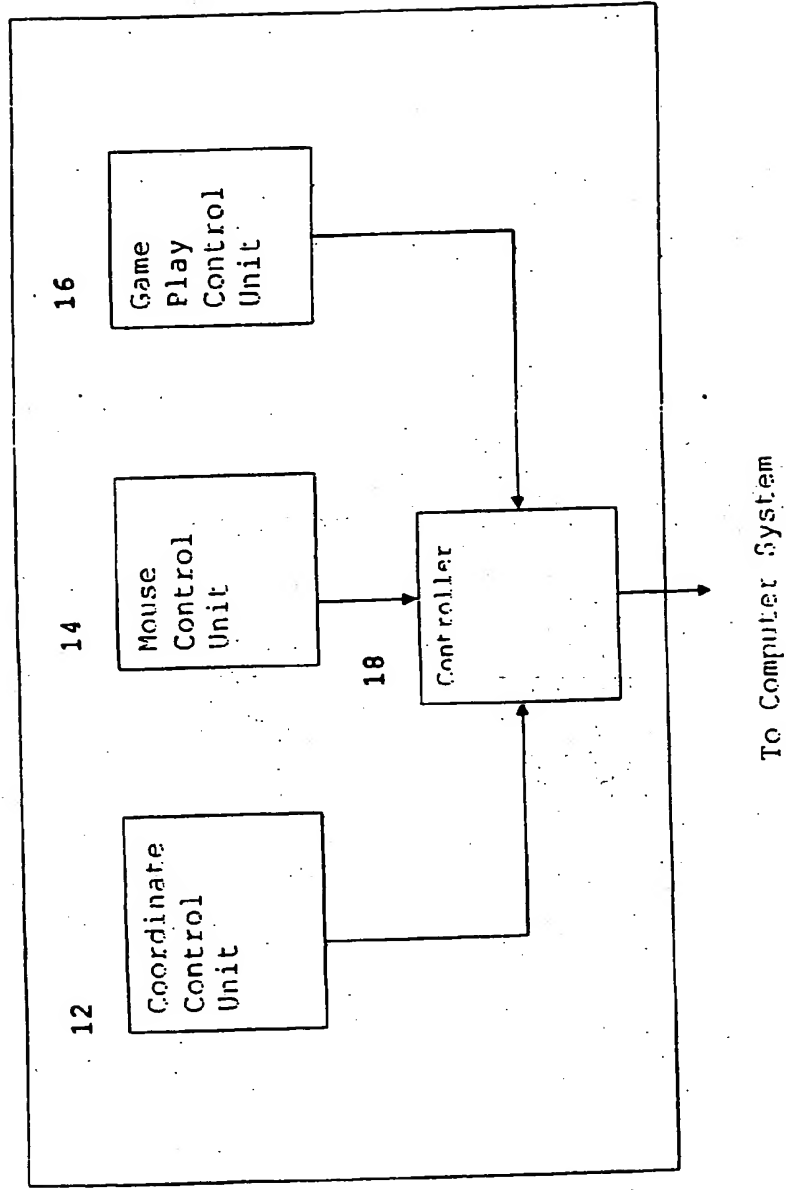
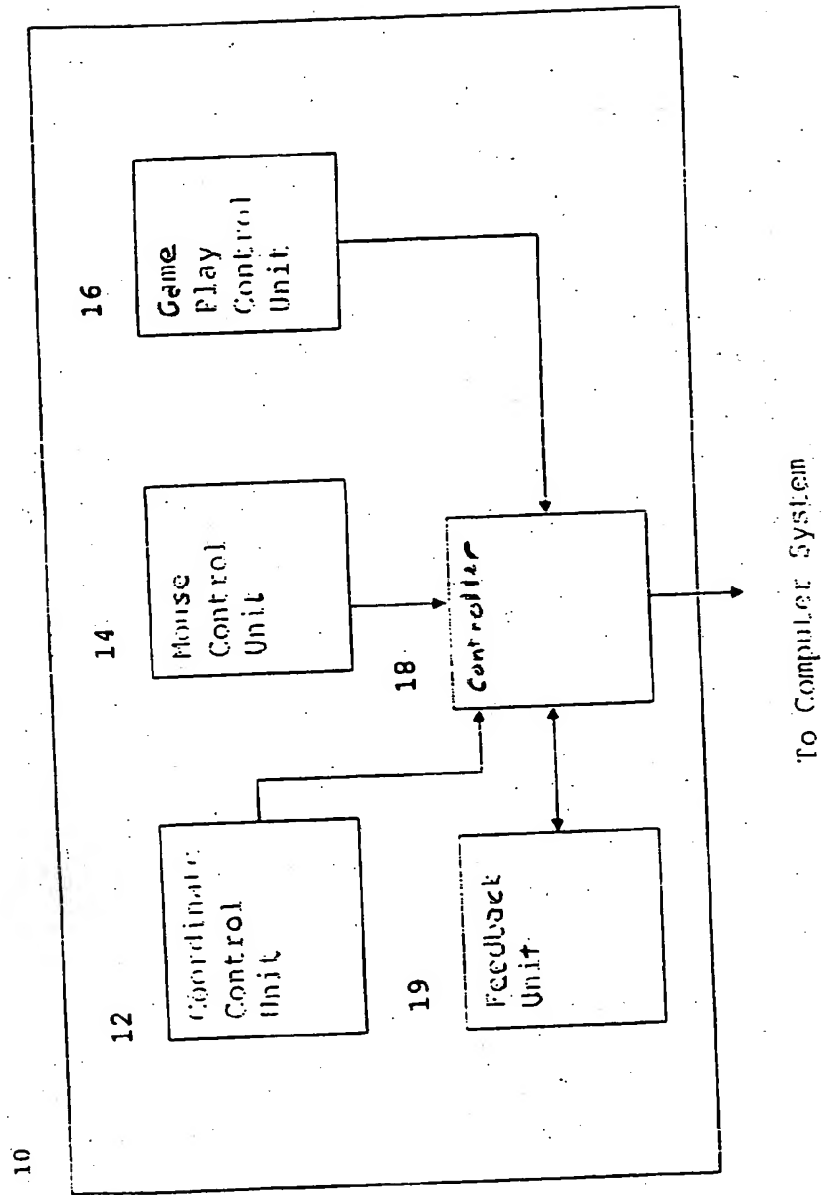


FIGURE 1A



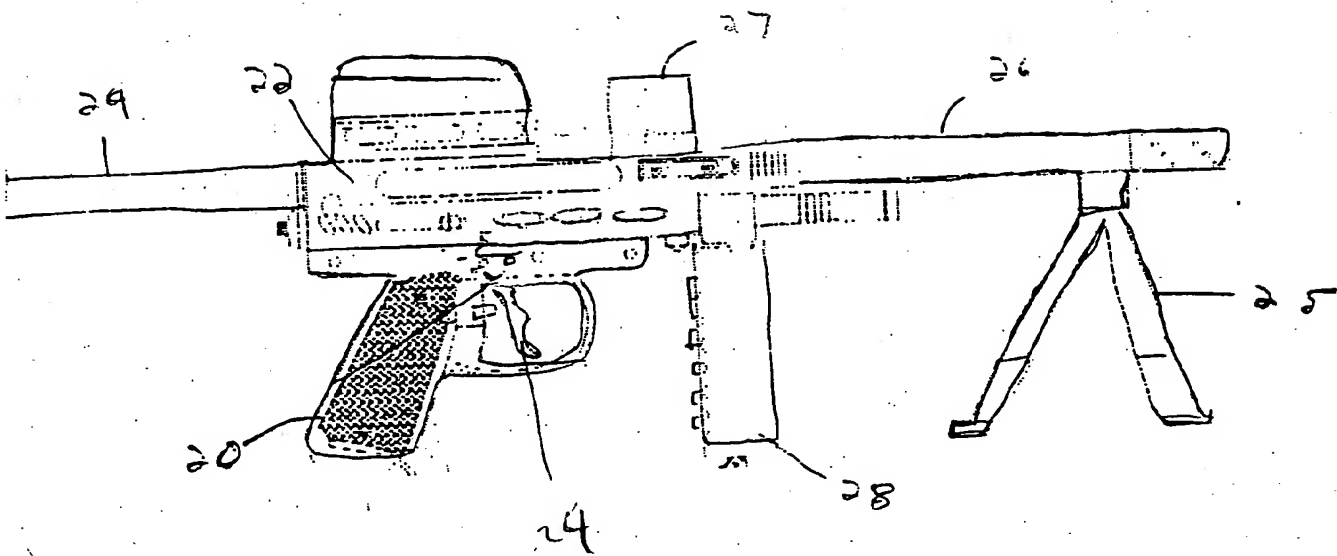


Figure 2

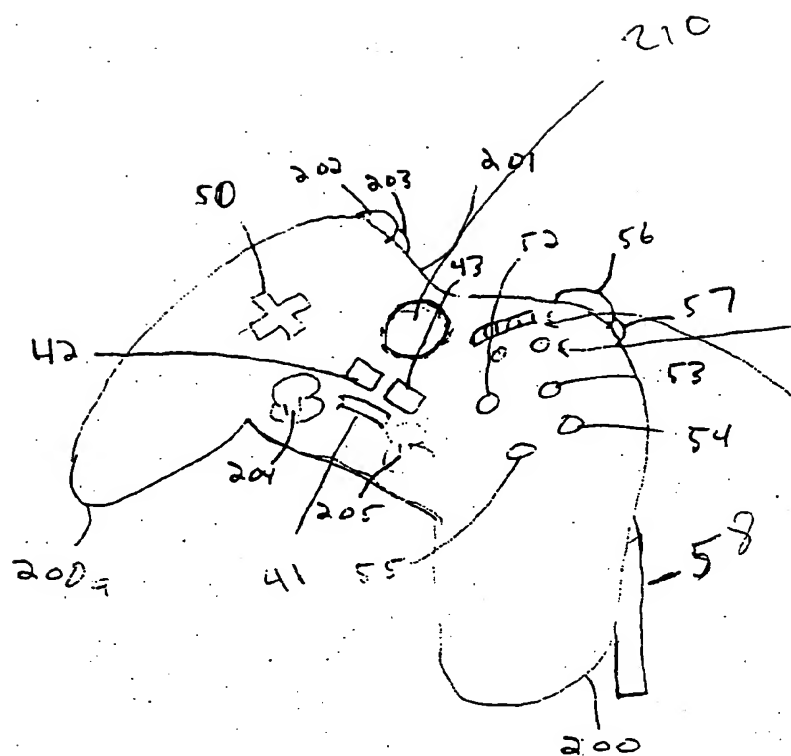


Figure 2A

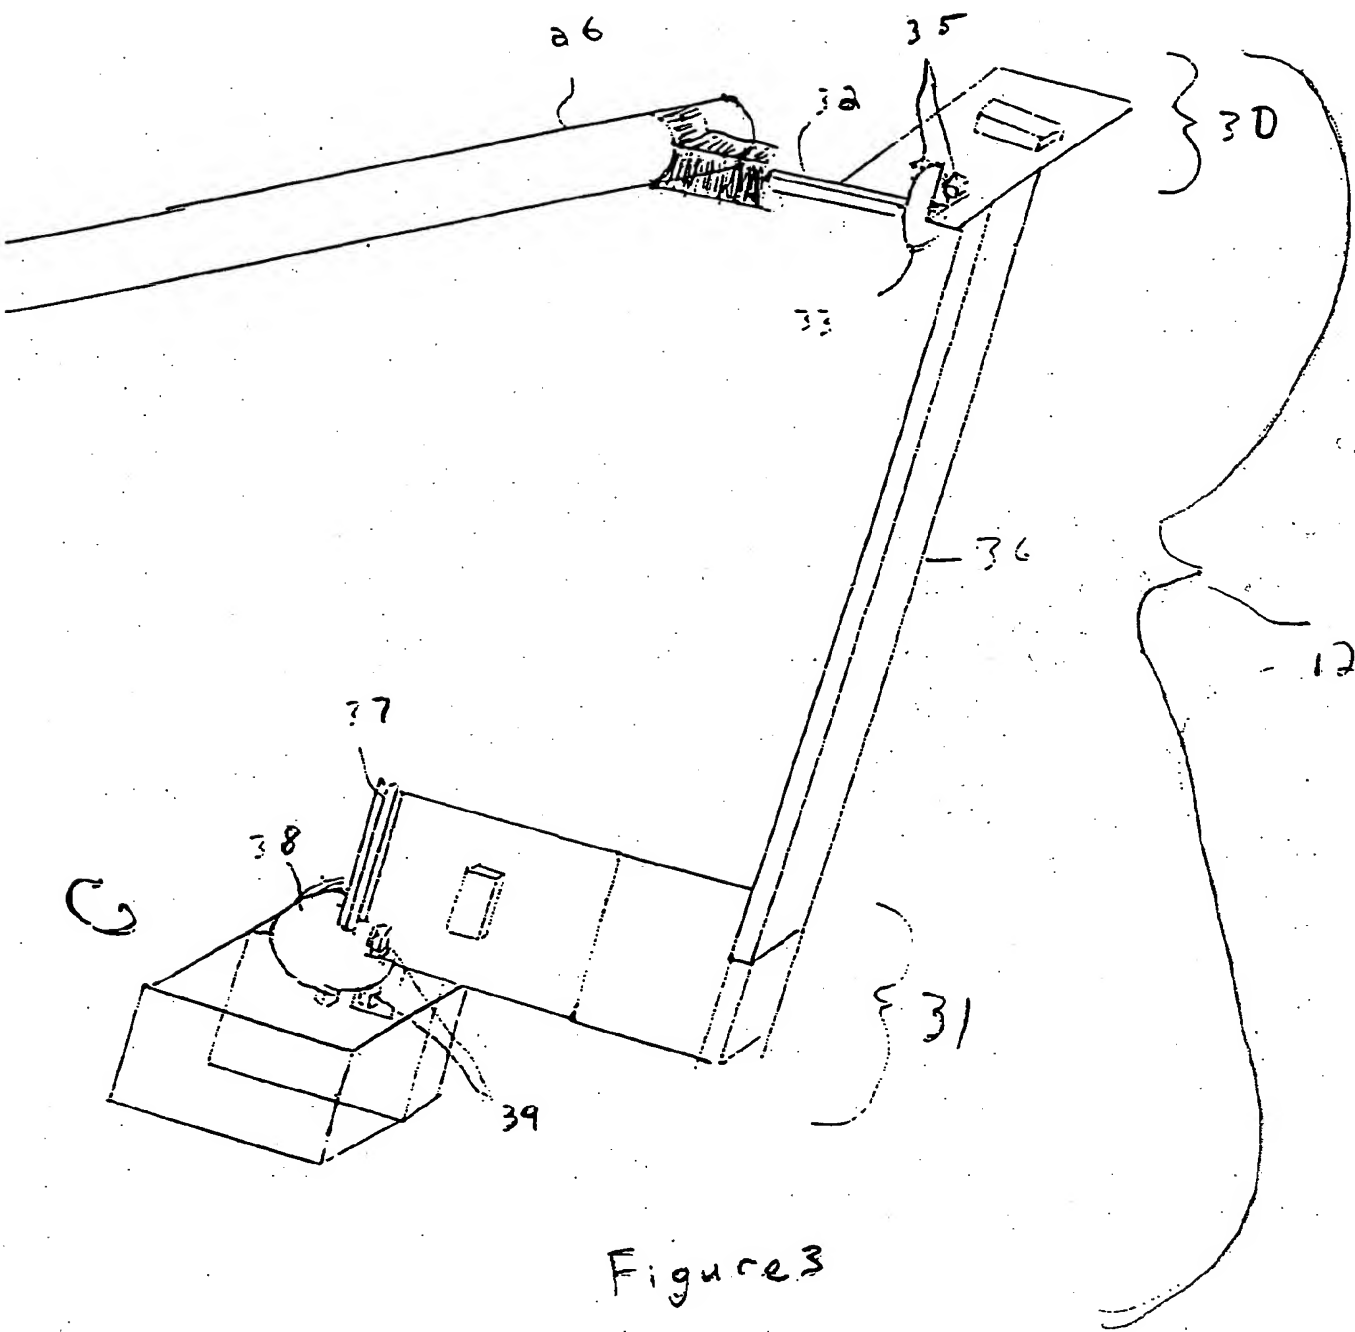


Figure 3

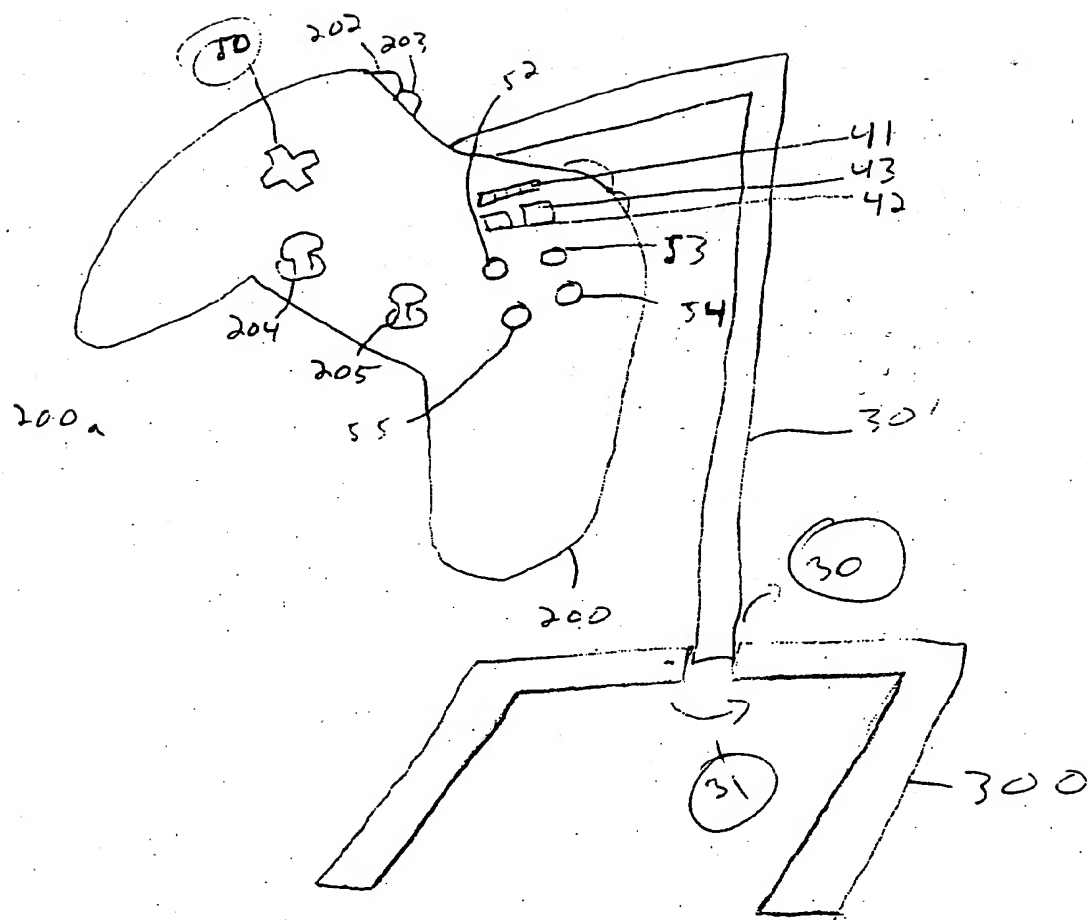


Figure 3A

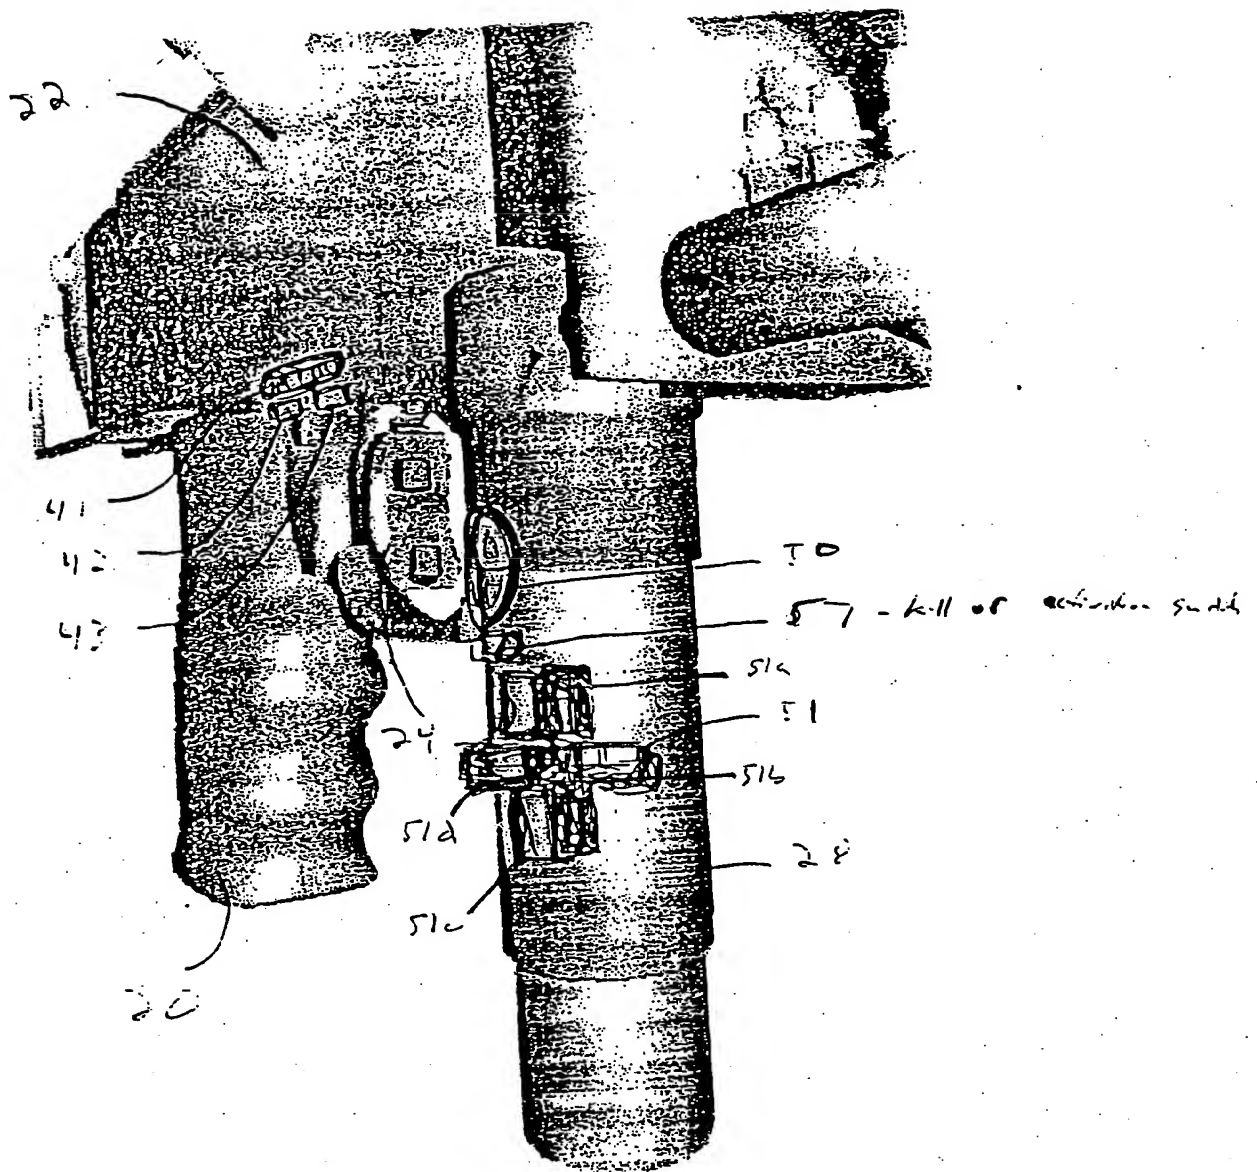


Figure 4

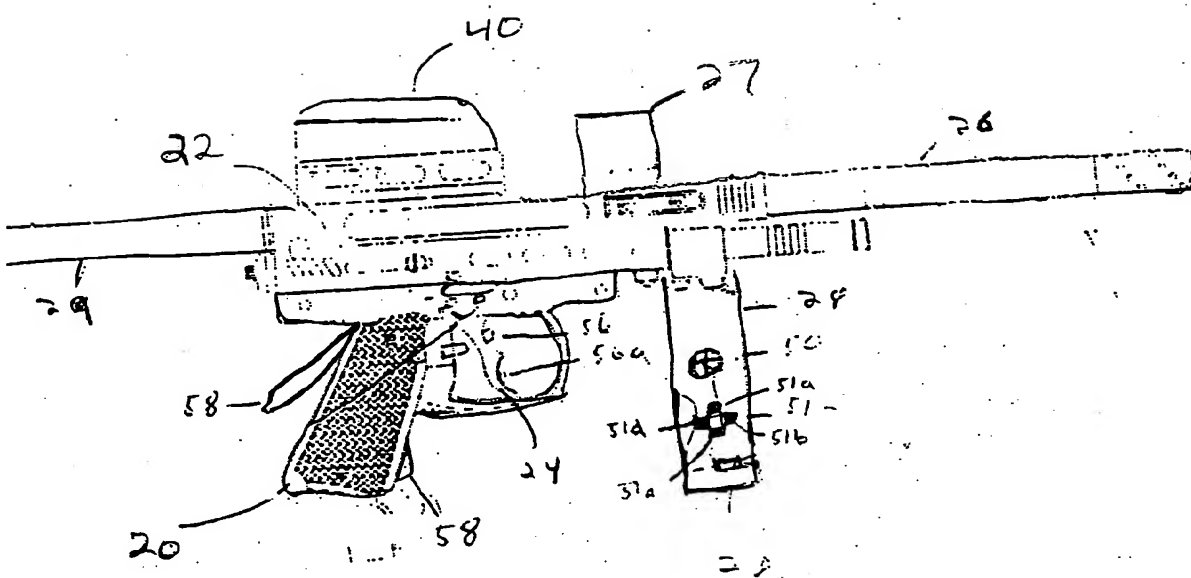


Figure 5

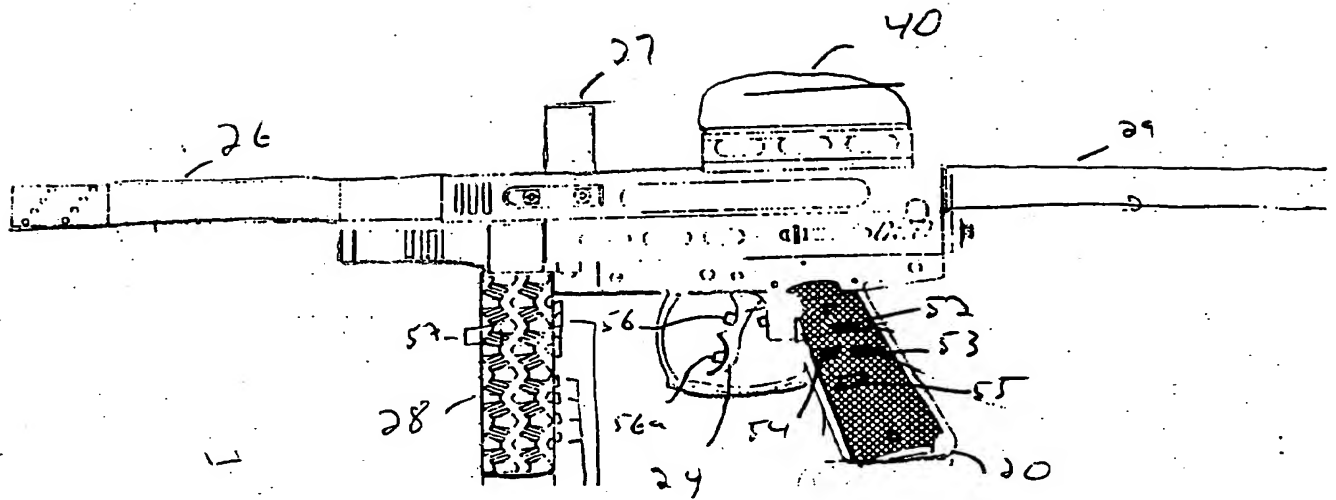
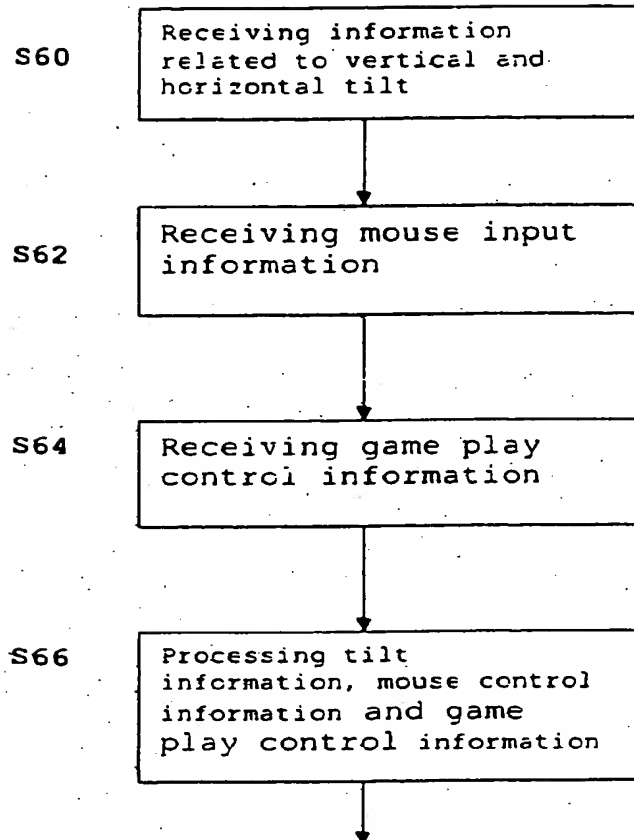


Figure 5A

FIGURE 6



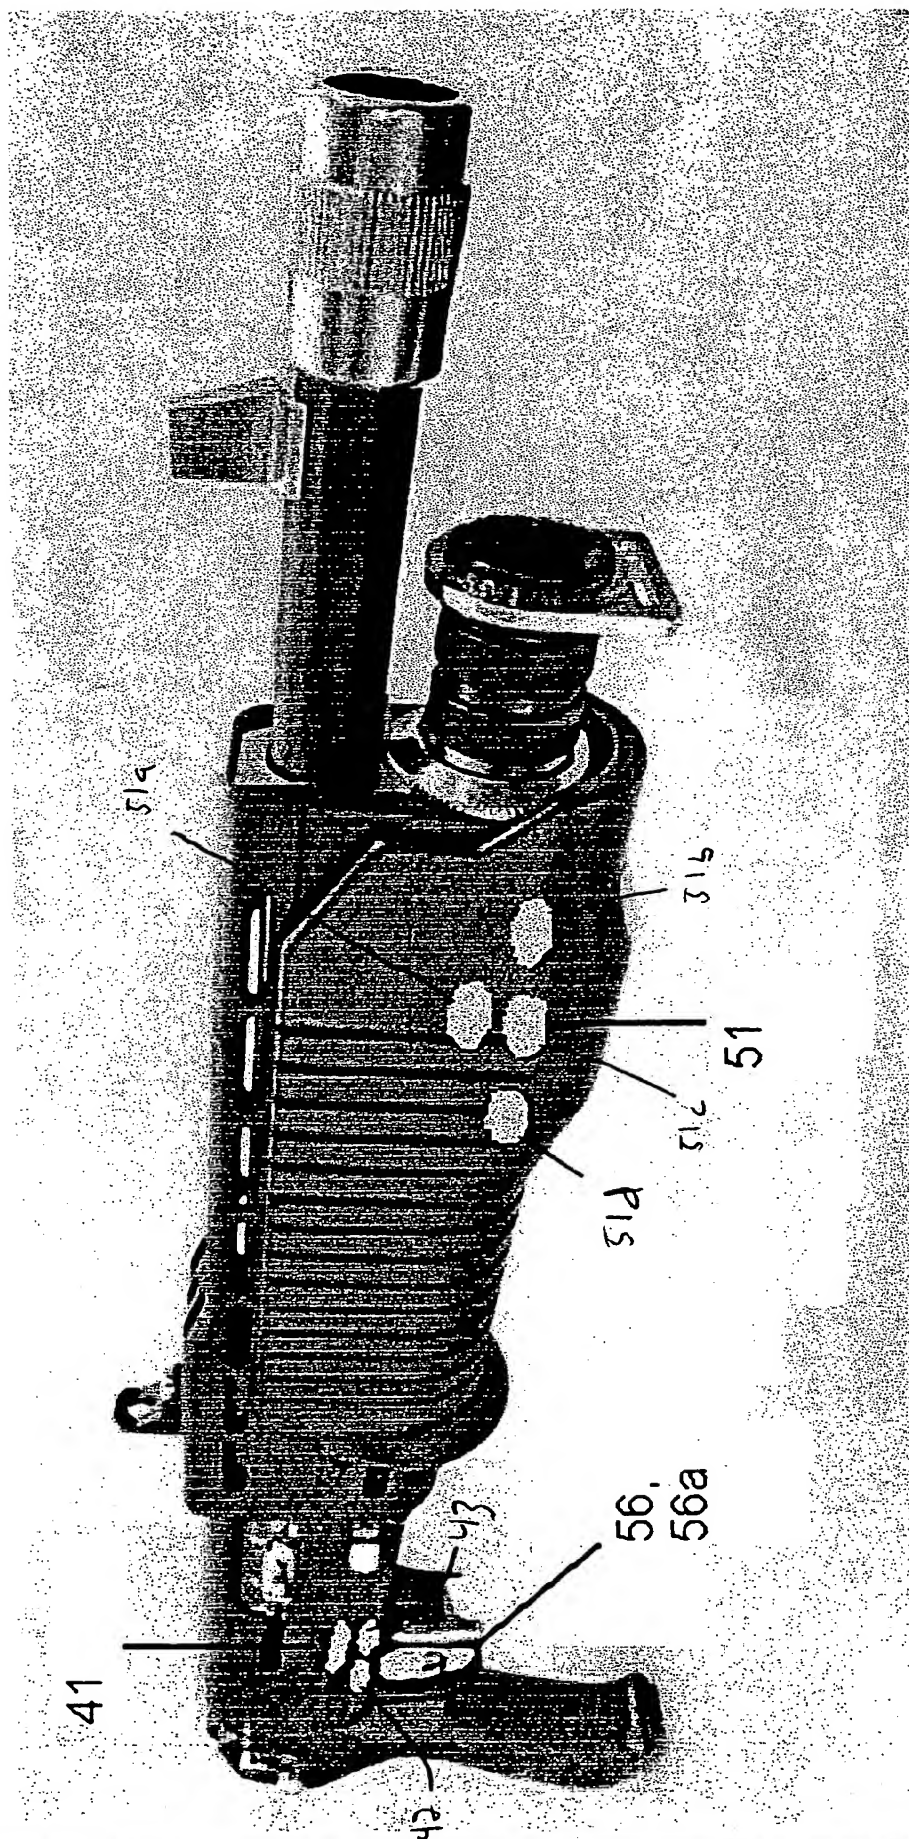


Figure 7

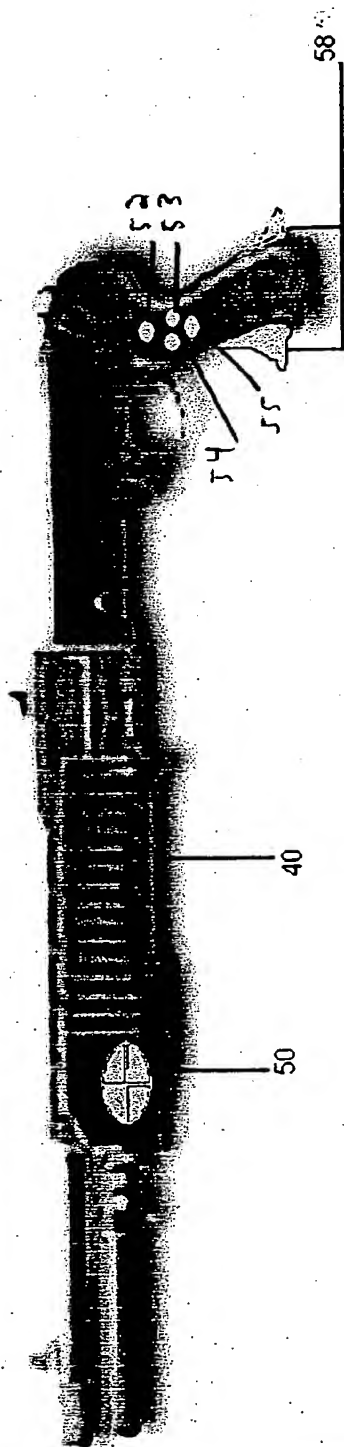


Figure 7A

<u>Number</u>	<u>Country</u>	<u>Filing Date</u>	<u>Yes</u>	<u>No</u>
N/A				
N/A				
N/A				

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below:

<u>Provisional Application No.</u>	<u>Filing Date</u>	<u>Status</u>
N/A		
N/A		
N/A		

I hereby claim the benefits under Title 35, United States Code, Section 120 of any United States Application(s), or Section 365(c) of any PCT International Application(s) designating the United States listed below. Insofar as this application discloses and claims subject matter in addition to that disclosed in any such prior Application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56, which became available between the filing date(s) of such prior Application(s) and the national or PCT international filing date of this application:

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
N/A		
N/A		
N/A		

And I hereby appoint

Norman H. Zivin (Reg. No. 25,385); Christopher C. Dunham (Reg. No. 22,031); Ivan S. Kavrukov (Reg. No. 25,161); John P. White (Reg. No. 28,678); Jay H. Maioli (Reg. No. 27,213); William E. Pelton (Reg. No. 25,702); Robert D. Katz (Reg. No. 30,141); Peter J. Phillips (Reg. No. 29,691); Wendy E. Miller (Reg. No. 35,615); Richard S. Milner (Reg. No. 33,970); Robert T. Maldonado (Reg. 38,232); Richard F. Jaworski (Reg. No. 33,515); and Paul Teng (Reg. No. 40,837)


and each of them, all c/o Cooper & Dunham LLP of 1185 Avenue of the Americas, New York, New York 10036, my attorneys, each with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent, to transact all business in the Patent and Trademark Office connected therewith and to file any International Applications which are based thereon under the provisions of the Patent Cooperation Treaty.

Please address all communications, and direct all telephone calls, regarding this application to:

Norman H. Zivin
Cooper & Dunham, LLP
1185 Avenue of the Americas
New York, New York 10036
Tel. (212) 278-0400

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or
first joint inventor Eric J. Argentar

Inventor's signature  Date of signature Dec. 10, 03

Residence Brooklyn, New York, U.S.A.

Post Office Address 558 Montgomery Street, Brooklyn, N.Y 11225

Citizenship United States of America